

Product datasheet:

Cable glands Progress® nickel-plated brass with trumpet and clamps

Entry thread metric

Approval type: Progress MS T+KB

- Two-piece sealing insert
- not overall length insulated
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



Article number:  **1801.10.20**

E-No: 121421508

EAN: 7611614127385

Packaging quantity: 50

Dimensions / Form


Thread: M20x1.5

Spanner size: 24 mm

Ø A: 34 mm

Dimension H: 46 mm

Thread length L: 6 mm

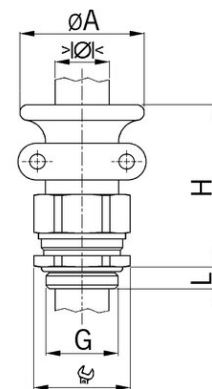

Connections / Entries

Min. clamping range: 11 mm

Max. clamping range: 15 mm

Clamping range with inlet min.: 8 mm

Clamping range with inlet max.: 11 mm

clamp technology: Compression technology

Features

Thread type: metric

Thread length: short

Approvals / Certifications

Protection class: IP 69

Protection class with condition: IP 68 (10 bar) / IP69

VDE: Yes

Storage / Installation / Operation

Minimum operating temperature: -40 °C

Maximum operating temperature: 100 °C



Assembly instructions



Certificates



Planning data