

Product datasheet:

Cable glands Progress® nickel-plated brass with trumpet and clamps

Entry thread metric

Approval type: Progress MS T+KB

- Two-piece sealing insert
- not overall length insulated
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



Article number:  **1801.10.40**

E-No: 121421808

EAN: 7611614127415

Packaging quantity: 5

Dimensions / Form

Thread: M40x1.5

Spanner size: 46 mm

Ø A: 57 mm

Dimension H: 59 mm

Thread length L: 8 mm

Connections / Entries

Min. clamping range: 28.5 mm

Max. clamping range: 33 mm

Clamping range with inlet min.: 24 mm

Clamping range with inlet max.: 28.5 mm

clamp technology: Compression technology

Features

Thread type: metric

Thread length: short

Approvals / Certifications

Protection class: IP 69


Protection class with condition: IP 68 (10 bar) / IP69

VDE: Yes

Storage / Installation / Operation

Minimum operating temperature: -40 °C

Maximum operating temperature: 100 °C

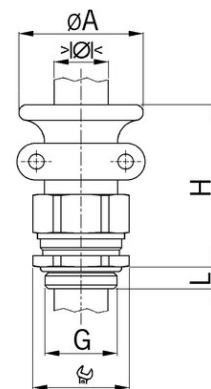

Assembly instructions



Certificates



Planning data