

Product datasheet:

Cable glands Progress® nickel-plated brass with trumpet and clamps

Entry thread Pg


- Two-piece sealing insert
- not overall length insulated
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



Article number:	⇒ 1801.10.11
EAN:	7611614127262
Packaging quantity:	50
Price group:	540

Dimensions / Form

Thread:	Pg 11
Spanner size:	21 mm
Ø A:	30 mm
Dimension H:	43 mm
Thread length L:	6 mm

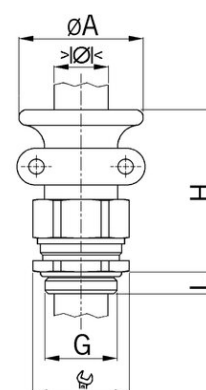

Connections / Entries

Min. clamping range:	8.5 mm
Max. clamping range:	12 mm
Clamping range with inlet min.:	5.5 mm
Clamping range with inlet max.:	8.5 mm
clamp technology:	Compression technology

Features

Thread type:	metric
Thread length:	short

Approvals / Certifications

Protection class:	IP 69
Protection class with condition:	IP 68 (10 bar) / IP69

Storage / Installation / Operation

Minimum operating temperature:	-40 °C
Maximum operating temperature:	100 °C



Assembly instructions



Planning data