

Product datasheet:

Cable glands Progress® nickel-plated brass with trumpet and clamps

Entry thread Pg

- Two-piece sealing insert
- not overall length insulated
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



Article number:	⇒ 1801.11.29
EAN:	7611614127361
Packaging quantity:	10
Price group:	540

Dimensions / Form

Thread:	Pg 29
Spanner size:	38 mm
Ø A:	50 mm
Dimension H:	59 mm
Thread length L:	12 mm

Connections / Entries

Min. clamping range:	23 mm
Max. clamping range:	27.5 mm
Clamping range with inlet min.:	19 mm
Clamping range with inlet max.:	23 mm
clamp technology:	Compression technology

Features


Thread type:	Pg
Thread length:	long

Approvals / Certifications

Protection class:	IP 69
Protection class with condition:	IP 68 (10 bar) / IP69

Storage / Installation / Operation

Minimum operating temperature:	-40 °C
Maximum operating temperature:	100 °C

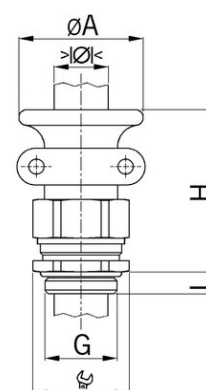

Assembly instructions



Planning data