

## Product datasheet:

# Cable glands Progress® stainless steel A2

## Long entry thread Pg

- Two-piece sealing insert
- not overall length insulated
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



|                        |                   |
|------------------------|-------------------|
| <b>Article number:</b> | <b>1100.48.94</b> |
| EAN:                   | 7611614134154     |
| Packaging quantity:    | 10                |

### Dimensions / Form

|                  |       |
|------------------|-------|
| Thread:          | Pg 48 |
| Spanner size:    | 65 mm |
| Dimension H:     | 37 mm |
| Thread length L: | 15 mm |

### Connections / Entries

|                                 |                        |
|---------------------------------|------------------------|
| Min. clamping range:            | 43 mm                  |
| Max. clamping range:            | 49 mm                  |
| Clamping range with inlet min.: | 37 mm                  |
| Clamping range with inlet max.: | 43 mm                  |
| clamp technology:               | Compression technology |

### Features


|                |      |
|----------------|------|
| Thread type:   | Pg   |
| Thread length: | long |

### Approvals / Certifications

|                                  |                       |
|----------------------------------|-----------------------|
| Protection class:                | IP69                  |
| Protection class with condition: | IP 68 (10 bar) / IP69 |

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -40 °C |
| Maximum operating temperature: | 100 °C |

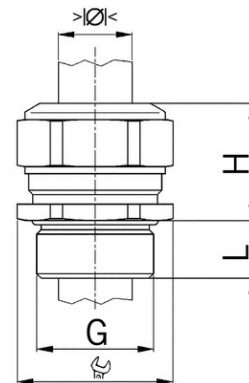

Assembly instructions



Planning data