

## Product datasheet:

# Cable glands Progress® stainless steel A2 for high temperature applications

## Long entry thread metric

### Approval type: Progress S2 HT

- One-piece sealing insert
- not overall length insulated
- 1 = Metric coarse-pitch thread (with VDE Testreport)



|                        |                       |
|------------------------|-----------------------|
| <b>Article number:</b> | <b>1100.10.96.040</b> |
| EAN:                   | 7611614133683         |
| Packaging quantity:    | 50                    |
| Price group:           | 570                   |

### Dimensions / Form

|                  |         |
|------------------|---------|
| Thread:          | M10x1.5 |
| Spanner size:    | 13 mm   |
| Dimension H:     | 15 mm   |
| Thread length L: | 10 mm   |

### Connections / Entries

|                      |                        |
|----------------------|------------------------|
| Min. clamping range: | 3 mm                   |
| Max. clamping range: | 4 mm                   |
| clamp technology:    | Compression technology |

### Features


|                |        |
|----------------|--------|
| Thread type:   | metric |
| Thread length: | long   |

### Approvals / Certifications

|                                  |                       |
|----------------------------------|-----------------------|
| Protection class:                | IP69                  |
| Protection class with condition: | IP 68 (10 bar) / IP69 |

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -40 °C |
| Maximum operating temperature: | 200 °C |

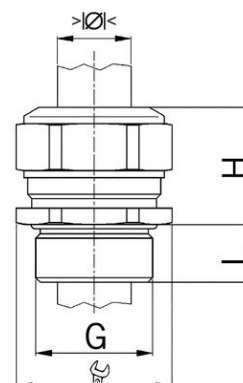

Assembly instructions



Certificates



Planning data