

Product datasheet:

Cable glands Progress® nickel-plated brass elbow 90°

Short entry thread metric

Approval type: Progress MS W90

- Two-piece sealing insert
- not overall length insulated
- 1 = One-piece sealing insert
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



Article number: **5200.17**

EAN: 7611614128634

Packaging quantity: 50

Price group: 540

Dimensions / Form

Thread: M16x1.5


Spanner size: 18 mm

Dimension A: 13 mm

Dimension B: 36 mm

Dimension H: 30 mm

Thread length L: 8 mm

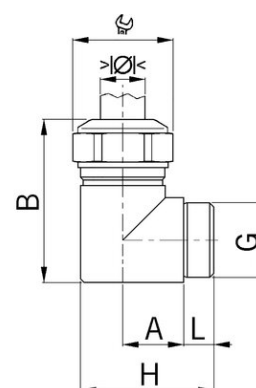

Connections / Entries

Min. clamping range: 8 mm

Max. clamping range: 10.5 mm

Clamping range with inlet min.: 6 mm

Clamping range with inlet max.: 8 mm

clamp technology: Compression technology

Features

Thread type: metric

Thread length: short

Approvals / Certifications

Protection class: IP68

Protection class with condition: IP68 (if connection thread is sealed)

VDE: Yes

Storage / Installation / Operation

Minimum operating temperature: -40 °C

Maximum operating temperature: 100 °C



Assembly instructions



Certificates



Planning data