

## Product datasheet:

# Cable glands Progress® nickel-plated brass elbow 90°

## Short entry thread metric

### Approval type: Progress MS W90

- Two-piece sealing insert
- not overall length insulated
- 1 = One-piece sealing insert
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



**Article number:** **5200.20**

**EAN:** 7611614128641

**Packaging quantity:** 50

**Price group:** 540

### Dimensions / Form

**Thread:** M20x1.5


**Spanner size:** 24 mm

**Dimension A:** 16 mm

**Dimension B:** 44 mm

**Dimension H:** 35 mm

**Thread length L:** 8 mm

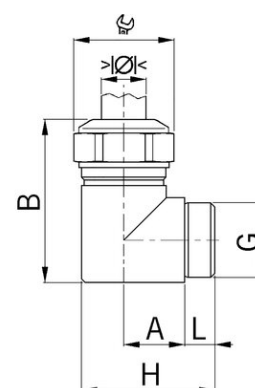

### Connections / Entries

**Min. clamping range:** 11 mm

**Max. clamping range:** 15 mm

**Clamping range with inlet min.:** 8 mm

**Clamping range with inlet max.:** 11 mm

**clamp technology:** Compression technology

### Features

**Thread type:** metric

**Thread length:** short

### Approvals / Certifications

**Protection class:** IP68

**Protection class with condition:** IP68 (if connection thread is sealed)

**VDE:** Yes

### Storage / Installation / Operation

**Minimum operating temperature:** -40 °C

**Maximum operating temperature:** 100 °C



Assembly instructions



Certificates



Planning data