

Product datasheet:

Cable glands Progress® nickel-plated brass elbow 90°

Short entry thread metric

Approval type: Progress MS W90

- Two-piece sealing insert
- not overall length insulated
- 1 = One-piece sealing insert
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



Article number: **5200.40**

EAN: 7611614128672

Packaging quantity: 10

Price group: 540

Dimensions / Form

Thread: M40x1.5


Spanner size: 46 mm

Dimension A: 28 mm

Dimension B: 72 mm

Dimension H: 60 mm

Thread length L: 10 mm

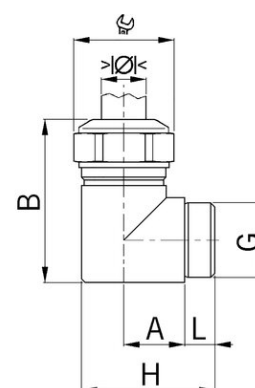

Connections / Entries

Min. clamping range: 28.5 mm

Max. clamping range: 33 mm

Clamping range with inlet min.: 24 mm

Clamping range with inlet max.: 28.5 mm

clamp technology: Compression technology

Features

Thread type: metric

Thread length: short

Approvals / Certifications

Protection class: IP68

Protection class with condition: IP68 (if connection thread is sealed)

VDE: Yes

Storage / Installation / Operation

Minimum operating temperature: -40 °C

Maximum operating temperature: 100 °C



Assembly instructions



Certificates



Planning data