

O-range ECON[®]

The cavity wall box which does more!



O-range ECON[®] Multiple boxes

Grandiose

 **KAISER**
The basis for good installation

Grandi**o**se

More installation space

CONVENIENT

Fast installation of **pre-wired accessories** without spatial separation

Maximum flexibility for fixing accessories; generous tolerance compensation

Ideal for installing
2, 3 or 4 accessories






With the new **O-range ECON® 2 / 3 / 4-gang junction boxes**, KAISER provides the perfect basis for very easy fitting of all standard installation accessories in multiple combinations.

- Easy wiring of multiple accessories thanks to the large installation opening without a central bridge
- Toolless cable and conduit entry
- Standardised, easy separation of the individual installation openings by fitting an insertable central bridge


PLOPP

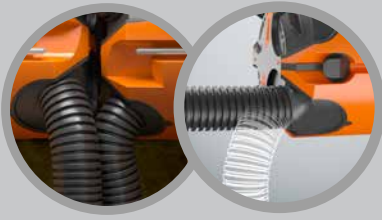

Up to 90° variable conduit entry angle! Ideal for use in slim wall constructions



The opening tab:
Toolless new opening technology for defined opening of the conduit membrane – guaranteed permanently air-tight!

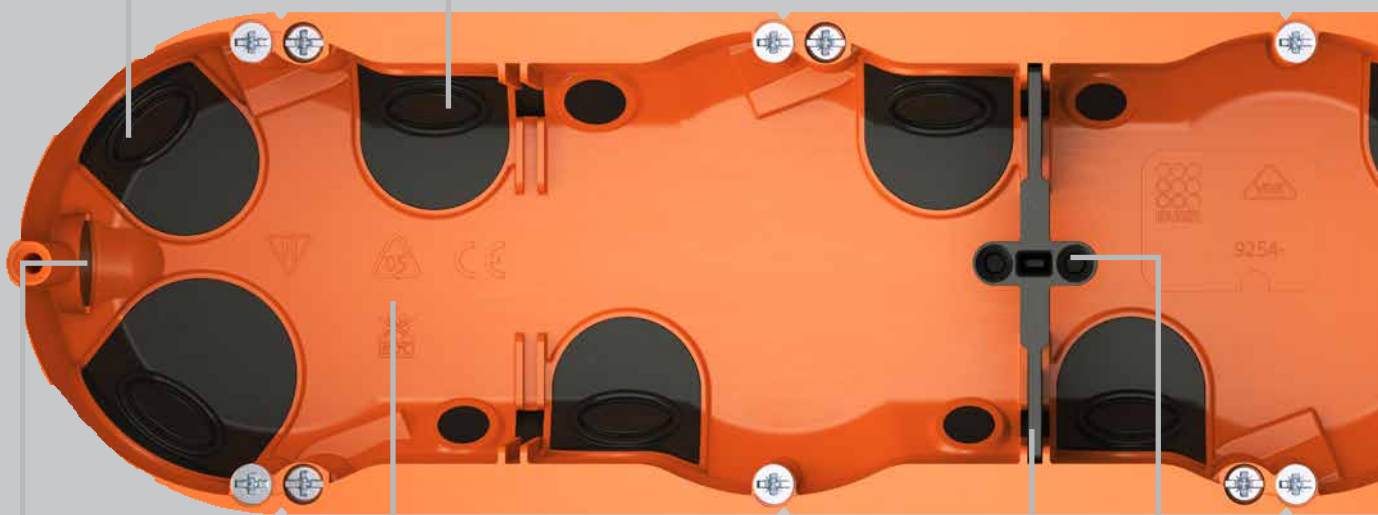

Combinable with all applications in the O-range® series



Front through-wiring:
Easy installation of pre-wired accessories without spatial separation




Break-off edge on the bridge for front through-wiring when a bridge is fitted



Possible accessory fixing at the bridge: By means of 2 additional screw domes



Air-tight electrical installation acc. to DIN 18015-5:
Firm fit thanks to standardised cable retention acc. to DIN EN 60670

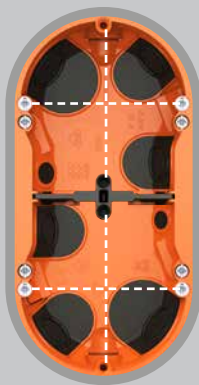

Four screw domes for each accessory:
Horizontal and vertical fixing of accessories when a bridge is fitted




Size marking on the membranes




Device screws:
With +/- head!



For any screwdriver head!

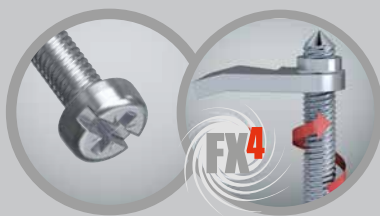

FX4 lug screws:
The fastest available screw fixing for cavity wall boxes!

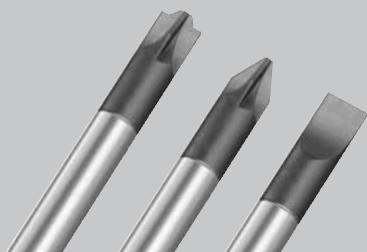



Articles for cavity wall installation	O-range ECON® 2-gang junction box	O-range ECON® 2-gang junction box (halogen-free)	O-range ECON® 3-gang junction box	O-range ECON® 3-gang junction box (halogen-free)	O-range ECON® 4-gang junction box	O-range ECON® 4-gang junction box (halogen-free)	Support connector	Support connector (halogen-free)
For panel thickness	7–40 mm	7–40 mm	7–40 mm	7–40 mm	7–40 mm	7–40 mm		
Depth	48 mm	48 mm	48 mm	48 mm	48 mm	48 mm		
Conduit entries up to Ø 20 mm	4	4	6	6	8	8		
Conduit entries up to Ø 25 mm	2	2	2	2	2	2		
Cable entries 3 x 1.5 mm²	1	1	2	2	4	4		
Number of installation device openings	2	2	3	3	4	4		
Cable entries 3 x 2.5 mm² or 5 x 1.5 mm²	1	1	2	2	2	2		
Art. No.	9252-22	9252-78	9253-22	9253-78	9254-22	9254-78	9060-98	9060-78
Inner packaging/shipping	10 / 100	10 / 100	5 / 50	5 / 50	5 / 50	5 / 50	25 / 100	25 / 100

Additional articles in the O-range ECON® product family:



9263-22*

9264-22*

9266-22*

9268-94*

9273-91*

9280-22

The right tools:



1083-10

1083-70

1083-51

The right accessories:



1085-99

1190-02

5000

5000-78

1040-16

1040-20

1040-25

* also available as halogen-free



Product film



O-range®
The new cavity
wall box!

KAISER GmbH & Co. KG

Ramsloh 4 · 58579 Schalksmühle
GERMANY

Tel. +49(0)2355.809.0 · Fax +49(0)2355.809.21

www.kaiser-elektro.de · info@kaiser-elektro.de

KAISER
The basis for good installation