

Product datasheet:

Cable glands Progress® nickel-plated brass elbow 90°

Short entry thread Pg

- Two-piece sealing insert
- not overall length insulated
- 1 = One-piece sealing insert
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



Article number:  **5200.11**

EAN: 7611614128702

Packaging quantity: 50

Price group: 540

Dimensions / Form

Thread:	Pg 11
Spanner size:	21 mm
Dimension A:	14 mm
Dimension B:	40 mm
Dimension H:	35 mm
Thread length L:	8 mm

Connections / Entries

Min. clamping range:	8.5 mm
Max. clamping range:	12 mm
Clamping range with inlet min.:	5.5 mm
Clamping range with inlet max.:	8.5 mm
clamp technology:	Compression technology

Features


Thread type:	Pg
Thread length:	short

Approvals / Certifications

Protection class:	IP68
Protection class with condition:	IP68 (if connection thread is sealed)

Storage / Installation / Operation

Minimum operating temperature:	-40 °C
Maximum operating temperature:	100 °C

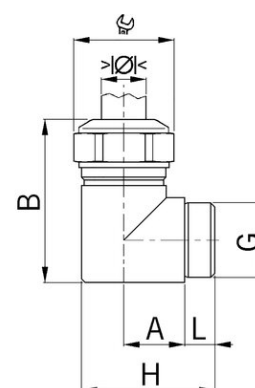

Assembly instructions



Planning data