

Product datasheet:

Cable glands Progress® nickel-plated brass elbow 90°

Short entry thread Pg

- Two-piece sealing insert
- not overall length insulated
- 1 = One-piece sealing insert
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



Article number:  **5200.21**

EAN: 7611614128733

Packaging quantity: 25

Price group: 540

Dimensions / Form

Thread: Pg 21


Spanner size: 30 mm

Dimension A: 20 mm

Dimension B: 52 mm

Dimension H: 44 mm

Thread length L: 10 mm

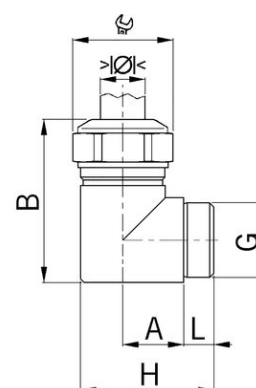

Connections / Entries

Min. clamping range: 16 mm

Max. clamping range: 20.5 mm

Clamping range with inlet min.: 12.5 mm

Clamping range with inlet max.: 16 mm

clamp technology: Compression technology

Features

Thread type: Pg

Thread length: short

Approvals / Certifications

Protection class: IP68

Protection class with condition: IP68 (if connection thread is sealed)

Storage / Installation / Operation

Minimum operating temperature: -40 °C

Maximum operating temperature: 100 °C



Assembly instructions



Planning data