

Product datasheet:

Cable glands Progress® nickel-plated brass elbow 90°

Long entry thread Pg

- Two-piece sealing insert
- not overall length insulated
- 1 = One-piece sealing insert
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



Article number:  **5210.11**

EAN: 7611614128986

Packaging quantity: 50

Price group: 540

Dimensions / Form

Thread: Pg 11


Spanner size: 21 mm

Dimension A: 14 mm

Dimension B: 40 mm

Dimension H: 38 mm

Thread length L: 11 mm

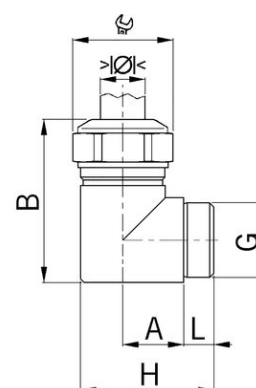

Connections / Entries

Min. clamping range: 8.5 mm

Max. clamping range: 12 mm

Clamping range with inlet min.: 5.5 mm

Clamping range with inlet max.: 8.5 mm

clamp technology: Compression technology

Features

Thread type: Pg

Thread length: long

Approvals / Certifications

Protection class: IP68

Protection class with condition: IP68 (if connection thread is sealed)

Storage / Installation / Operation

Minimum operating temperature: -40 °C

Maximum operating temperature: 100 °C



Assembly instructions



Planning data