

O-range®

Our two new additions!



Conduit box

Junction box Ø 120 mm

50 YEARS OF CAVITY WALL BOXES

 **KAISER**
The basis for good installation

TWO NEW BOXES:

Even more installation space in the wall!



INCOMPARABLE

Two new air-tight boxes!
Impressively versatile
and easy to fit!

NEW

**O-range ECON®
Conduit one-gang junction box:**

For continuous conduit
installation in the cavity
wall. With the tried-and-
tested ECON® technology.

NEW

**O-range ECON®
Junction box Ø 120 mm:**

With plenty of space
for easy wiring.




O-range ECON®
Conduit one-gang
junction box



O-range ECON®
Junction box
Ø 120 mm

O-range® – The new cavity wall box!

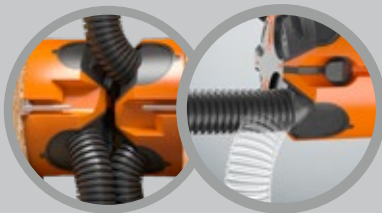

Conduit entry angle
variable up to 90°!




Size marked on
the membrane.

Plenty of space for:



• Equipotential
busbar



• Fixing points
for DIN rail



• Separation of two
electrical circuits

FX⁴ screws:
The fastest screw fixings in
existence for cavity wall boxes!



•range ECON®
Junction box
Ø 120 mm



•range ECON®
Conduit one-gang
junction box



OPEN UP

NEW



The opening tab:

Toolless new opening technology for defined
opening of the conduit membrane –
permanently air-tight, guaranteed!

NEW

Conduit entries:

- 2 up to max. M20
- 2 up to max. M25



Reinforced elastic membrane:
No tearing of the entry



**Air-tight electrical
installation acc.
to DIN 18015-5**

16 cable entries:
Toolless insertion
with cable
retention


Conduit entries:
6 to max. M25

Device/cover screws:
With plus-minus drive!

NEW



**Suitable, no
matter which
screwdriver you
have at hand!**

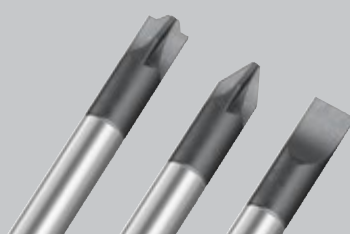



Article	O-range ECON® Conduit one-gang junction box	O-range ECON® Conduit one-gang junction box (halogen-free)	Support connector	Support connector (halogen-free)	O-range ECON® Junction box Ø 120 mm	O-range ECON® Junction box Ø 120 mm (halogen-free)	Separator wall for electrical circuit separation
For panel thickness	7 – 40 mm	7 – 40 mm			7 – 40 mm	7 – 40 mm	
Depth	62 mm	62 mm			65 mm	65 mm	
Cut hole Ø	68 mm	68 mm			120 mm	120 mm	
Box/cover screws +/-	2	2			2	2	
ECON® conduit entries up to max. M20	2	2			–	–	
ECON® conduit entries up to max. M25	2	2			6	6	
Cable entries 3 x 1.5 mm ²	–	–			6	6	
Cable entries 3 x 2.5 mm ² or 5 x 1.5 mm ²	–	–			6	6	
Cable entries 5 x 2.5 mm ² or 7 x 1.5 mm ²	–	–			4	4	
Support connectors per packing unit	7	7					
Covers per packing unit					10	10	
Halogen-free	–	•	–	•	–	•	
Air-tight	•	•			•	•	
VDE / ÖVE	• / •	• / •			• / •	• / •	
Art. No.	9266-22	9266-77	9060-98	9060-78	9273-91	9273-77	9073-20
Packaging inner/dispatch	25 / 250	25 / 250	25 / 100	25 / 100	– / 10	– / 10	– / 10

Additional articles in the O-range® product family:



9063-02*



9064-02*



9263-22*



9264-22*



9268-94*

Matching tools:



1083-10



1083-70



1082-20

* also available in halogen-free



O-range®
The new
cavity wall box!

KAISER GmbH & Co. KG

Ramsloh 4 · 58579 Schalksmühle
GERMANY

Tel. +49(0)2355.809.0 · Fax +49(0)2355.809.21
www.kaiser-elektro.de · info@kaiser-elektro.de



Trailer



Product film

KAISER
The basis for good installation