

## Product datasheet:

# Cable glands Progress® nickel-plated brass elbow 90°

## Long entry thread metric with lock nut

### Approval type: Progress MS W90

- Two-piece sealing insert
- not overall length insulated
- 1 = One-piece sealing insert
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



|                        |                |
|------------------------|----------------|
| <b>Article number:</b> | <b>5215.20</b> |
| E-No:                  | 121521508      |
| EAN:                   | 7611614133409  |
| Packaging quantity:    | 50             |

### Dimensions / Form

|                  |         |
|------------------|---------|
| Thread:          | M20x1.5 |
| Spanner size:    | 24 mm   |
| Dimension A:     | 16 mm   |
| Dimension B:     | 44 mm   |
| Dimension H:     | 39 mm   |
| Thread length L: | 12 mm   |

### Connections / Entries

|                                 |                        |
|---------------------------------|------------------------|
| Min. clamping range:            | 11 mm                  |
| Max. clamping range:            | 15 mm                  |
| Clamping range with inlet min.: | 8 mm                   |
| Clamping range with inlet max.: | 11 mm                  |
| clamp technology:               | Compression technology |

### Features


|                |        |
|----------------|--------|
| Thread type:   | metric |
| Thread length: | long   |

### Approvals / Certifications

|                   |      |
|-------------------|------|
| Protection class: | IP68 |
| VDE:              | Yes  |

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -40 °C |
| Maximum operating temperature: | 100 °C |

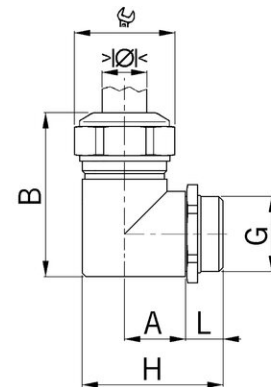

Assembly instructions



Certificates



Planning data