

## Product datasheet:

# Cable glands Progress® nickel-plated brass elbow 90°

## Long entry thread metric with lock nut

### Approval type: Progress MS W90

- Two-piece sealing insert
- not overall length insulated
- 1 = One-piece sealing insert
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



**Article number:** **5215.40**

**EAN:** 7611614133430

**Packaging quantity:** 10

**Price group:** 540

### Dimensions / Form

|                  |         |
|------------------|---------|
| Thread:          | M40x1.5 |
| Spanner size:    | 46 mm   |
| Dimension A:     | 28 mm   |
| Dimension B:     | 72 mm   |
| Dimension H:     | 66 mm   |
| Thread length L: | 16 mm   |

### Connections / Entries

|                                 |                        |
|---------------------------------|------------------------|
| Min. clamping range:            | 28.5 mm                |
| Max. clamping range:            | 33 mm                  |
| Clamping range with inlet min.: | 24 mm                  |
| Clamping range with inlet max.: | 28.5 mm                |
| clamp technology:               | Compression technology |

### Features


|                |        |
|----------------|--------|
| Thread type:   | metric |
| Thread length: | long   |

### Approvals / Certifications

|                   |      |
|-------------------|------|
| Protection class: | IP68 |
| VDE:              | Yes  |

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -40 °C |
| Maximum operating temperature: | 100 °C |

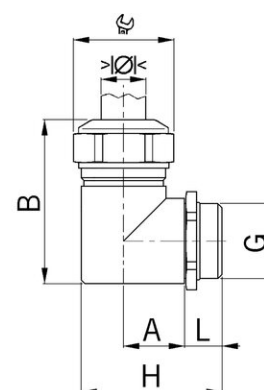

Assembly instructions



Certificates



Planning data