

## Product datasheet:

# Flanged elbow 90° zinc diecasting

## Flanged elbow 90° zinc diecasting


· with 1 entry thread



|                        |               |
|------------------------|---------------|
| <b>Article number:</b> | <b>5520</b>   |
| E-No:                  | 126258509     |
| EAN:                   | 7611614162997 |
| Packaging quantity:    | 10            |

### Dimensions / Form

|                        |          |
|------------------------|----------|
| Thread:                | M20x1.5  |
| Product length:        | 10.5 mm  |
| Dimension A:           | 8 mm     |
| Measurement value B C: | 53x56 mm |
| Measurement value D:   | 44 mm    |
| Measurement value F:   | 5.5 mm   |
| Dimension H:           | 18.0 mm  |
| Dimension value I:     | 35 mm    |
| Dimension K:           | 34 mm    |
| Dimension L:           | 10.5 mm  |
| Measurement value M:   | 24 mm    |

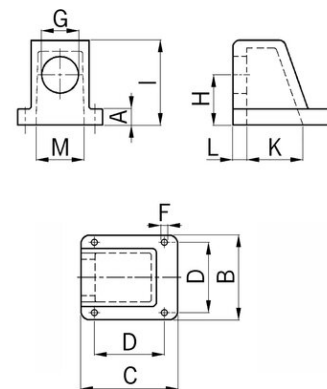

### Connections / Entries

|                   |                        |
|-------------------|------------------------|
| clamp technology: | Compression technology |
|-------------------|------------------------|

### Features

|              |                                                                                                      |
|--------------|------------------------------------------------------------------------------------------------------|
| Properties:  | For splash water-proof mounting on casing walls with entry thread for cable glands or conduit glands |
| Thread type: | metric                                                                                               |

### Approvals / Certifications

|                   |      |
|-------------------|------|
| Protection class: | IP65 |
|-------------------|------|

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -40 °C |
| Maximum operating temperature: | 100 °C |