

## Product datasheet:

# Cable glands Progress® EMC easyCONNECT nickel-plated brass with contact spring

## Short entry thread metric

### Approval type: Progress EMV easyCONNECT

- Two-piece sealing insert
- not overall length insulated
- 1 = One-piece sealing insert
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.
- Entry thread Pg and NPT



**Article number:** **1083.12.050**

**EAN:** 7611614249698

**Packaging quantity:** 50

**Price group:** 520


### Dimensions / Form

**Thread:** M12x1.5

**Spanner size:** 15 mm

**Dimension H:** 22 mm

**Thread length L:** 5 mm

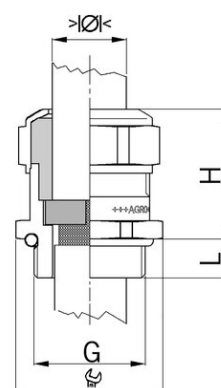

### Connections / Entries

**Min. clamping range:** 3.5 mm

**Max. clamping range:** 5 mm

**clamp technology:** Compression technology

**Contact:** Contact spring



### Safety / Properties

**Shielded design (EMC):** Yes

### Features

**Properties:** For a quick and safe installation of partially dismantled cables as well as thoroughly shielded cables

**Thread type:** metric

**Thread length:** short

### Approvals / Certifications

**Protection class:** IP69

**Protection class with condition:** IP 68 (10 bar) / IP69

**VDE:** Yes



Assembly instructions



Certificates



Planning data

## Product datasheet:

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -60 °C |
| Maximum operating temperature: | 100 °C |