

Product datasheet:

Cable glands Progress® EMC easyCONNECT nickel-plated brass with contact spring

Short entry thread metric

Approval type: Progress EMV easyCONNECT

- Two-piece sealing insert
- not overall length insulated
- 1 = One-piece sealing insert
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.
- Entry thread Pg and NPT



Article number: **1083.17**

EAN: 7611614249711

Packaging quantity: 50

Price group: 520


Dimensions / Form

Thread: M16x1.5

Spanner size: 18 mm

Dimension H: 25 mm

Thread length L: 5 mm

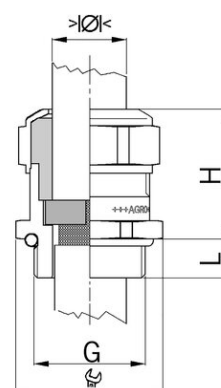

Connections / Entries

Min. clamping range: 8 mm

Max. clamping range: 10.5 mm

Clamping range with inlet min.: 6 mm

Clamping range with inlet max.: 8 mm

clamp technology: Compression technology

Contact: Contact spring

Safety / Properties

Shielded design (EMC): Yes

Features

Properties: For a quick and safe installation of partially dismantled cables as well as thoroughly shielded cables

Thread type: metric

Thread length: short

Approvals / Certifications

Protection class: IP69



Assembly instructions



Certificates



Planning data

Product datasheet:

Protection class with condition:	IP 68 (10 bar) / IP69
----------------------------------	-----------------------

VDE:	Yes
------	-----

Storage / Installation / Operation

Minimum operating temperature:	-60 °C
--------------------------------	--------

Maximum operating temperature:	100 °C
--------------------------------	--------