Product datasheet:

# Cable glands Progress® EMC easyCONNECT stainless steel A2 with contact spring

## Short entry thread metric

· Two-piece sealing insert
· not overall length insulated
· For high temperature applications
· 1 = One-piece sealing insert
· Long entry thread metric

| **Article number:** | **1083.25.96** |
|---|---|
| EAN: | 7611614477282 |
| Packaging quantity: | 25 |

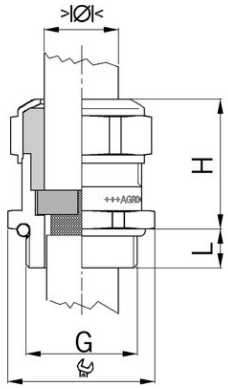


**Dimensions / Form**

| | |
|---|---|
| Thread: | M25x1.5 |
| Spanner size: | 30 mm |
| Dimension H: | 33 mm |
| Thread length L: | 8 mm |

**Connections / Entries**

| | |
|---|---|
| Min. clamping range: | 16 mm |
| Max. clamping range: | 20.5 mm |
| Clamping range with inlet min.: | 12.5 mm |
| Clamping range with inlet max.: | 16 mm |
| clamp technology: | Compression technology |
| Contact: | Contact spring |

**Safety / Properties**

| | |
|---|---|
| Shielded design (EMC): | Yes |

**Features**

| | |
|---|---|
| Properties: | For a quick and safe installation of partially dismantled cables as well as thoroughly shielded cables |
| Thread type: | metric |
| Thread length: | short |

**Approvals / Certifications**

| | |
|---|---|
| Protection class: | IP69 |
| Protection class with condition: | IP 68 (10 bar) / IP69 |

**Storage / Installation / Operation**

**Assembly instructions**

**Planning data**

# Product datasheet:

| | |
|---|---|
| Minimum operating temperature: | -40 °C |
| Maximum operating temperature: | 200 °C |