

## Product datasheet:

# Cable glands Progress® EMC easyCONNECT nickel-plated brass with contact spring

## Long entry thread metric

### Approval type: Progress EMV easyCONNECT

- Two-piece sealing insert
- not overall length insulated
- 1 = One-piece sealing insert
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.
- Entry thread Pg and NPT
- Executions in steel A2 and A4



|                        |                |
|------------------------|----------------|
| <b>Article number:</b> | <b>1183.25</b> |
| EAN:                   | 7611614249797  |
| Packaging quantity:    | 25             |
| Price group:           | 520            |

### Dimensions / Form

|                  |         |
|------------------|---------|
| Thread:          | M25x1.5 |
| Spanner size:    | 30 mm   |
| Dimension H:     | 33 mm   |
| Thread length L: | 11 mm   |

### Connections / Entries

|                                 |                        |
|---------------------------------|------------------------|
| Min. clamping range:            | 16 mm                  |
| Max. clamping range:            | 20.5 mm                |
| Clamping range with inlet min.: | 12.5 mm                |
| Clamping range with inlet max.: | 16 mm                  |
| clamp technology:               | Compression technology |
| Contact:                        | Contact spring         |

### Safety / Properties


|                        |     |
|------------------------|-----|
| Shielded design (EMC): | Yes |
|------------------------|-----|

### Features

|                |                                                                                                        |
|----------------|--------------------------------------------------------------------------------------------------------|
| Properties:    | For a quick and safe installation of partially dismantled cables as well as thoroughly shielded cables |
| Thread type:   | metric                                                                                                 |
| Thread length: | long                                                                                                   |

### Approvals / Certifications

|                   |      |
|-------------------|------|
| Protection class: | IP69 |
|-------------------|------|

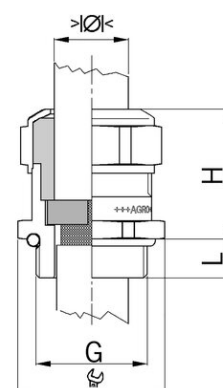

Assembly instructions



Certificates



Planning data

## Product datasheet:

|                                  |                       |
|----------------------------------|-----------------------|
| Protection class with condition: | IP 68 (10 bar) / IP69 |
|----------------------------------|-----------------------|

|      |     |
|------|-----|
| VDE: | Yes |
|------|-----|

### **Storage / Installation / Operation**

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -60 °C |
|--------------------------------|--------|

|                                |        |
|--------------------------------|--------|
| Maximum operating temperature: | 100 °C |
|--------------------------------|--------|