

Product datasheet:

Cable glands Progress® EMC easyCONNECT nickel-plated brass with contact spring

Long entry thread metric

Approval type: Progress EMV easyCONNECT

- Two-piece sealing insert
- not overall length insulated
- 1 = One-piece sealing insert
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.
- Entry thread Pg and NPT
- Executions in steel A2 and A4



Article number:	1183.25
E-No:	121082708
EAN:	7611614249797
Packaging quantity:	25

Dimensions / Form

Thread:	M25x1.5
Spanner size:	30 mm
Dimension H:	33 mm
Thread length L:	11 mm

Connections / Entries

Min. clamping range:	16 mm
Max. clamping range:	20.5 mm
Clamping range with inlet min.:	12.5 mm
Clamping range with inlet max.:	16 mm
clamp technology:	Compression technology
Contact:	Contact spring

Safety / Properties


Shielded design (EMC):	Yes
------------------------	-----

Features

Properties:	For a quick and safe installation of partially dismantled cables as well as thoroughly shielded cables
Thread type:	metric
Thread length:	long

Approvals / Certifications

Protection class:	IP69
-------------------	------

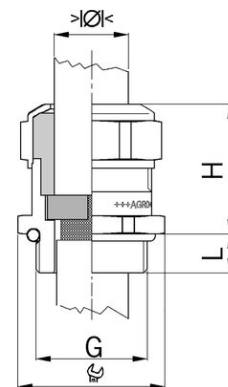

Assembly instructions



Certificates



Planning data

Product datasheet:

Protection class with condition:	IP 68 (10 bar) / IP69
----------------------------------	-----------------------

VDE:	Yes
------	-----

Storage / Installation / Operation

Minimum operating temperature:	-60 °C
--------------------------------	--------

Maximum operating temperature:	100 °C
--------------------------------	--------