

Product datasheet:

Cable glands Progress® EMC easyCONNECT nickel-plated brass with contact spring

Long entry thread metric

Approval type: Progress EMV easyCONNECT

- Two-piece sealing insert
- not overall length insulated
- 1 = One-piece sealing insert
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.
- Entry thread Pg and NPT
- Executions in steel A2 and A4



Article number: **1183.63**

EAN: 7611614290614

Packaging quantity: 5

Price group: 520


Dimensions / Form

Thread: M63x1.5

Spanner size: 70 mm

Dimension H: 42 mm

Thread length L: 14 mm

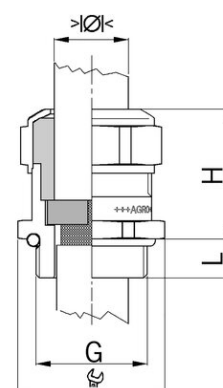

Connections / Entries

Min. clamping range: 46 mm

Max. clamping range: 52 mm

Clamping range with inlet min.: 40 mm

Clamping range with inlet max.: 46 mm

clamp technology: Compression technology

Contact: Contact spring

Features

Properties: For a quick and safe installation of partially dismantled cables as well as thoroughly shielded cables

Thread type: metric

Thread length: long

Approvals / Certifications

Protection class: IP69

Protection class with condition: IP 68 (10 bar) / IP69

VDE: Yes



Assembly instructions



Certificates



Planning data

Product datasheet:

Storage / Installation / Operation

Minimum operating temperature:	-60 °C
Maximum operating temperature:	100 °C