Product datasheet:

# Cable glands Progress® EMC Rapid nickel-plated brass with contact disc




## Long entry thread metric

### Approval type: Progress MS EMV Rapid

· One-piece sealing insert
· not overall length insulated

| **Article number:** | **1181.32.210** |
|---|---|
| E-No: | 121032628 |
| EAN: | 7611614207315 |
| Packaging quantity: | 25 |

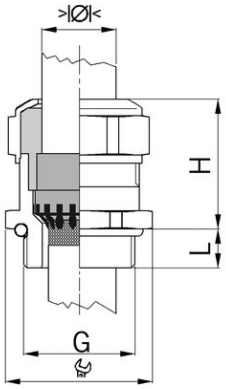


**Dimensions / Form**

| | |
|---|---|
| Thread: | M32x1.5 |
| Spanner size: | 36 mm |
| Dimension H: | 32 mm |
| Thread length L: | 13 mm |

**Connections / Entries**

| | |
|---|---|
| Min. clamping range: | 18 mm |
| Max. clamping range: | 21 mm |
| clamp technology: | Compression technology |
| Contact: | contact plate |

**Safety / Properties**

| | |
|---|---|
| Shielded design (EMC): | Yes |

**Features**

| | |
|---|---|
| Properties: | For a quick installation of partially dismantled cables as well as thoroughly shielded cables |
| Thread type: | metric |
| Thread length: | long |

**Material / Colour**

| | |
|---|---|
| Material: | Nickel-plated brass |

**Approvals / Certifications**

| | |
|---|---|
| Protection class: | IP68, IP69 |
| Protection class with condition: | IP 68 (10 bar) / IP69 |
| VDE: | Yes |

# Product datasheet:

**Storage / Installation / Operation**

| | |
|---|---|
| Minimum operating temperature: | -40 °C |
| Maximum operating temperature: | 100 °C |

**Assembly instructions**

**Certificates**

**Planning data**