

Product datasheet:

Cable glands Progress® EMC nickel-plated brass with contact sleeve

Short entry thread metric

Approval type: Progress MS EMV

- One-piece sealing insert
- not overall length insulated
- 1 = Metric coarse-pitch thread (with VDE Testreport)
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



Article number:	1080.08.035
E-No:	121072008
EAN:	7611614115344
Packaging quantity:	50

Dimensions / Form

Thread:	M8x1.25
Spanner size:	11 mm
Dimension H:	15 mm
Thread length L:	5 mm

Connections / Entries

Min. clamping range:	2.5 mm
Max. clamping range:	3.5 mm
clamp technology:	Compression technology
Contact:	Contact sleeve

Safety / Properties

Shielded design (EMC):	Yes
------------------------	-----

Features


Properties:	Excellent shield contact through the contact sleeve with the braided shield terminating in the screwed cable gland
Thread type:	metric
Thread length:	short

Approvals / Certifications

Protection class:	IP69
Protection class with condition:	IP 68 (10 bar) / IP69

Storage / Installation / Operation

Minimum operating temperature:	-40 °C
--------------------------------	--------

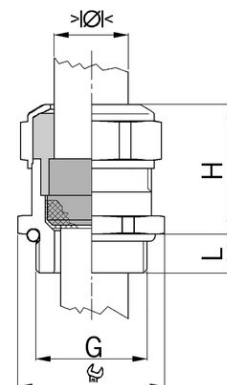

Assembly instructions



Certificates



Planning data

Product datasheet:

Maximum operating temperature:

100 °C
