

## Product datasheet:

# Cable glands Progress® EMC nickel-plated brass with contact sleeve

## Short entry thread metric

### Approval type: Progress MS EMV

- One-piece sealing insert
- not overall length insulated
- 1 = Metric coarse-pitch thread (with VDE Testreport)
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



**Article number:** **1080.25.160**

**E-No:** 121072508

**EAN:** 7611614114859

**Packaging quantity:** 25

### Dimensions / Form

**Thread:** M25x1.5

**Spanner size:** 30 mm

**Dimension H:** 30 mm

**Thread length L:** 7 mm

### Connections / Entries

**Min. clamping range:** 13 mm

**Max. clamping range:** 16 mm

**clamp technology:** Compression technology

**Contact:** Contact sleeve

### Safety / Properties

**Shielded design (EMC):** Yes

### Features

**Properties:** Excellent shield contact through the contact sleeve with the braided shield terminating in the screwed cable gland

**Thread type:** metric

**Thread length:** short


### Approvals / Certifications

**Protection class:** IP69

**Protection class with condition:** IP 68 (10 bar) / IP69

**VDE:** Yes

### Storage / Installation / Operation

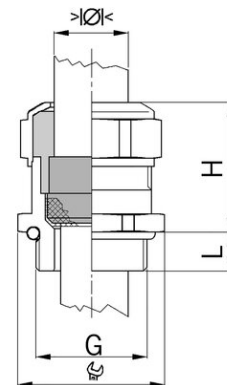

## Product datasheet:

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -40 °C |
| Maximum operating temperature: | 100 °C |



Assembly instructions



Certificates



Planning data