

Product datasheet:

Cable glands Progress® EMC nickel-plated brass with contact sleeve

Short entry thread metric

Approval type: Progress MS EMV

- One-piece sealing insert
- not overall length insulated
- 1 = Metric coarse-pitch thread (with VDE Testreport)
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



Article number:	1080.40.320
E-No:	121072718
EAN:	7611614119533
Packaging quantity:	10

Dimensions / Form

Thread:	M40x1.5
Spanner size:	46 mm
Dimension H:	34 mm
Thread length L:	8 mm

Connections / Entries

Min. clamping range:	28.5 mm
Max. clamping range:	32 mm
clamp technology:	Compression technology
Contact:	Contact sleeve

Safety / Properties

Shielded design (EMC):	Yes
------------------------	-----


Features

Properties:	Excellent shield contact through the contact sleeve with the braided shield terminating in the screwed cable gland
Thread type:	metric
Thread length:	short

Approvals / Certifications

Protection class:	IP69
Protection class with condition:	IP 68 (10 bar) / IP69
VDE:	Yes

Storage / Installation / Operation

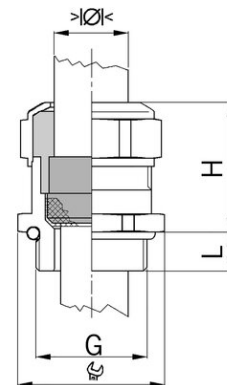

Product datasheet:

Minimum operating temperature:	-40 °C
Maximum operating temperature:	100 °C



Assembly instructions



Certificates



Planning data