

## Product datasheet:

# Cable glands Progress® EMC nickel-plated brass with contact sleeve

## Long entry thread Pg

### Approval type: Progress MS EMV

- One-piece sealing insert
- not overall length insulated
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



**Article number:** **1180.48.430**

**EAN:** 7611614119748

**Packaging quantity:** 10

**Price group:** 520

### Dimensions / Form

**Thread:** Pg 48

**Spanner size:** 65 mm

**Dimension H:** 42 mm

**Thread length L:** 15 mm

### Connections / Entries

**Min. clamping range:** 39 mm

**Max. clamping range:** 43 mm

**clamp technology:** Compression technology

**Contact:** Contact sleeve

### Safety / Properties

**Shielded design (EMC):** Yes

### Features

**Properties:** Excellent shield contact through the contact sleeve with the braided shield terminating in the screwed cable gland

**Thread type:** Pg

**Thread length:** long

### Approvals / Certifications


**Protection class:** IP69

**Protection class with condition:** IP 68 (10 bar) / IP69

### Storage / Installation / Operation

**Minimum operating temperature:** -40 °C

**Maximum operating temperature:** 100 °C

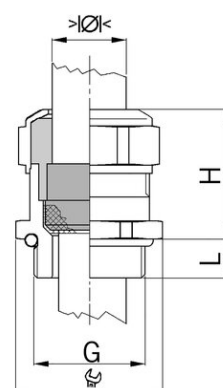

Assembly instructions



Planning data