

## Product datasheet:

# Cable glands Progress® EMC nickel-plated brass with antikink spring

## Short entry thread metric

### Approval type: Progress MS EMV FKN

- One-piece sealing insert
- not overall length insulated
- 1 = Metric coarse-pitch thread (with VDE Testreport)
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.
- Long entry thread



**Article number:**  **1080.25.52.160**

E-No: 121782608

EAN: 7611614195759

Packaging quantity: 10

### Dimensions / Form

|                  |         |
|------------------|---------|
| Thread:          | M25x1.5 |
| Spanner size:    | 30 mm   |
| Dimension H:     | 104 mm  |
| Thread length L: | 7 mm    |

### Connections / Entries

|                      |                        |
|----------------------|------------------------|
| Min. clamping range: | 13 mm                  |
| Max. clamping range: | 16 mm                  |
| clamp technology:    | Compression technology |

### Safety / Properties

|                        |     |
|------------------------|-----|
| Shielded design (EMC): | Yes |
|------------------------|-----|

### Features

|             |                                                                                                                    |
|-------------|--------------------------------------------------------------------------------------------------------------------|
| Properties: | Excellent shield contact through the contact sleeve with the braided shield terminating in the screwed cable gland |
|-------------|--------------------------------------------------------------------------------------------------------------------|

|              |        |
|--------------|--------|
| Thread type: | metric |
|--------------|--------|

|                |       |
|----------------|-------|
| Thread length: | short |
|----------------|-------|

### Approvals / Certifications


|                   |      |
|-------------------|------|
| Protection class: | IP69 |
|-------------------|------|

|                                  |                       |
|----------------------------------|-----------------------|
| Protection class with condition: | IP 68 (10 bar) / IP69 |
|----------------------------------|-----------------------|

|      |     |
|------|-----|
| VDE: | Yes |
|------|-----|

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -40 °C |
|--------------------------------|--------|

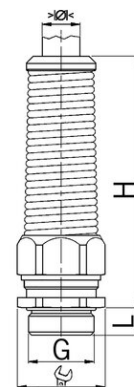

Assembly instructions



Certificates



Planning data

## Product datasheet:

Maximum operating temperature:

100 °C

---