

## Product datasheet:

# EVolution EMC SETALL R1

## complete SET lower part long

- Complet set
- Electromobility
- Reliable processing
- Other cross sections



|                        |                           |
|------------------------|---------------------------|
| <b>Article number:</b> | <b>1189.20.090.SETAR1</b> |
| EAN:                   | 7611614494944             |
| Packaging quantity:    | 25                        |

### Dimensions / Form

|                  |         |
|------------------|---------|
| Thread:          | M20x1.5 |
| Spanner size:    | 24 mm   |
| Dimension H:     | 25.5 mm |
| Thread length L: | 10 mm   |

### Connections / Entries

|                      |                        |
|----------------------|------------------------|
| Min. clamping range: | 8.1 mm                 |
| Max. clamping range: | 9.1 mm                 |
| clamp technology:    | Compression technology |

### Safety / Properties

|                                 |                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Vibration resistance:           | Yes                                                                                                                                    |
| Vibration/sharpness definition: | Vibration profile sharpness grade 3 /<br>temperature profile sharpness grade 4 to<br>LV214 in accordance with EN<br>60068-2-14/-27/-27 |

### Features


|                |        |
|----------------|--------|
| Thread type:   | metric |
| Thread length: | long   |

### Approvals / Certifications

|                                  |               |
|----------------------------------|---------------|
| Protection class:                | IP68          |
| Protection class with condition: | IP 68_IP 6k9k |

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -40 °C |
| Maximum operating temperature: | 140 °C |

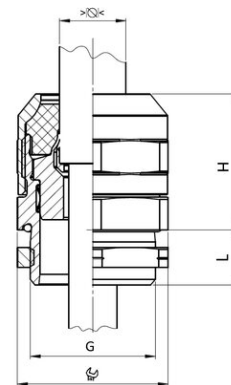

Assembly instructions



Technical information



Planning data