

Product datasheet:

Splittable Frame, size Q

Divisible frame Series 1910 for cables with and without connectors

· Set of 4 stainless steel AISI304 fastening screws · with black Dacromet finishing



Article number:	⇒ 1910.Q
EAN:	7611614496979
Packaging quantity:	10
Price group:	580

Dimensions / Form

Installation opening (wall/ceiling) length:	40 mm
Installation opening (wall/ceiling) width:	39 mm
Dimension A:	74 mm
Dimension B:	61 mm
Measurement value C:	26.5 mm
Cover for box/housing/casing Ø:	40x39 mm
Borehole distance X:	58 mm
Borehole distance Y:	32 mm

Connections / Entries

clamp technology:	Lamella technology
-------------------	--------------------

Safety / Properties

Flammability:	Self-extinguishing according to UL 94 V-0
---------------	---

Features

Properties:	Halogen and silicone free
Thread type:	metric
Thread length:	short


Approvals / Certifications

Protection class:	IP66
-------------------	------

Storage / Installation / Operation

Minimum operating temperature:	-40 °C
Maximum operating temperature:	155 °C

Thanks to the various cable grommets available, the divisible frames of the 1910 series allow cables with or without plugs with diameters from 2 to 35 mm to be fed through. The side closure of the frame provides strain relief and water protection. The opening grommets can be freely positioned within the frame. Protection class IP66 or NEMA 4X can be achieved with any combination of grommets (single, double, quadruple, break-out, large). The overmoulded seal and thus the complete V0 self-extinguishing of the

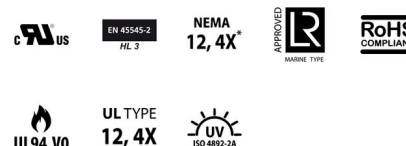

Assembly instructions



Planning data

Product datasheet:

system make the 1910 series a unique product.

- Multiple configurations in the same frame
- Fixing screws in steel AISI304
- degree of protection IP66 and NEMA 4X (indoor)
- High pull-out forces according to EN 62444
- Robust construction IK10
- overmolded gasket acc. to UL 94 V-0
- Colour black