

## Product datasheet:

# Splittable Frame, low profile, 2 passages

## Divisible frame Series 1911 low profile for cables with and without connectors

· A set of 2 stainless steel AISI304 fastening screws with black dacromet finishing



|                        |                |
|------------------------|----------------|
| <b>Article number:</b> | <b>1911.L2</b> |
| EAN:                   | 7611614501642  |
| Packaging quantity:    | 10             |
| Price group:           | 580            |

### Dimensions / Form

|                                             |          |
|---------------------------------------------|----------|
| Installation opening (wall/ceiling) length: | 40 mm    |
| Installation opening (wall/ceiling) width:  | 18 mm    |
| Dimension A:                                | 74 mm    |
| Dimension B:                                | 41 mm    |
| Measurement value C:                        | 26 mm    |
| Cover for box/housing/casing Ø:             | 40x18 mm |
| Borehole distance X:                        | 58 mm    |

### Safety / Properties

|               |                                           |
|---------------|-------------------------------------------|
| Flammability: | Self-extinguishing according to UL 94 V-0 |
|---------------|-------------------------------------------|

### Features

|             |                           |
|-------------|---------------------------|
| Properties: | Halogen and silicone free |
|-------------|---------------------------|

### Approvals / Certifications


|                   |      |
|-------------------|------|
| Protection class: | IP66 |
|-------------------|------|

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -40 °C |
| Maximum operating temperature: | 155 °C |

The 1911-low profile cable entry system consists of a splittable frame designed to accommodate small (1919.SPP) grommets for cables with or without connectors. With all combinations of grommets, e.g. single, double and quadruple, IP66 and NEMA 4X\* are guaranteed. The overmolded gasket guarantees faster installation times and the complete V0 self-extinguishing of the system.

- for small 1919.SPP grommets
- Fixing screws in steel AISI304
- IP66 certified, Nema 4X\* with any combination of grommets
- High pull-out forces according to EN 62444
- Robust construction IK10
- overmolded gasket acc. to UL 94 V-0
- Colour black

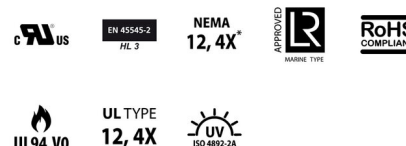

Assembly instructions



Planning data