

Product datasheet:

Splittable Frame, low profile, 3 passages

Divisible frame Series 1911 low profile for cables with and without connectors

· A set of 2 stainless steel AISI304 fastening screws with black dacromet finishing



Article number:	➔ 1911.L3
EAN:	7611614496917
Packaging quantity:	10
Price group:	580

Dimensions / Form

Installation opening (wall/ceiling) length:	63 mm
Installation opening (wall/ceiling) width:	18 mm
Dimension A:	99 mm
Dimension B:	41 mm
Measurement value C:	26 mm
Cover for box/housing/casing Ø:	63x18 mm
Borehole distance X:	83 mm

Safety / Properties

Flammability:	Self-extinguishing according to UL 94 V-0
---------------	---

Features

Properties:	Halogen and silicone free
-------------	---------------------------

Approvals / Certifications


Protection class:	IP66
-------------------	------

Storage / Installation / Operation

Minimum operating temperature:	-40 °C
Maximum operating temperature:	155 °C

The 1911-low profile cable entry system consists of a splittable frame designed to accommodate small (1919.SPP) grommets for cables with or without connectors. With all combinations of grommets, e.g. single, double and quadruple, IP66 and NEMA 4X* are guaranteed. The overmolded gasket guarantees faster installation times and the complete V0 self-extinguishing of the system.

- for small 1919.SPP grommets
- Fixing screws in steel AISI304
- IP66 certified, Nema 4X* with any combination of grommets
- High pull-out forces according to EN 62444
- Robust construction IK10
- overmolded gasket acc. to UL 94 V-0
- Colour black

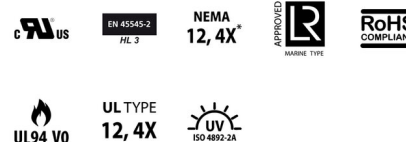

Assembly instructions



Planning data