

## Product datasheet:

# Splittable Frame, size 24, rear mounting

## Divisible frame Series 1912.xx.FT for rear mounting

|                     |               |
|---------------------|---------------|
| Article number:     | ➔ 1912.24.FT  |
| EAN:                | 7611614499703 |
| Packaging quantity: | 10            |

### Dimensions / Form

|                                             |           |
|---------------------------------------------|-----------|
| Installation opening (wall/ceiling) length: | 112 mm    |
| Installation opening (wall/ceiling) width:  | 39 mm     |
| Dimension A:                                | 146 mm    |
| Dimension B:                                | 61 mm     |
| Measurement value C:                        | 26.5 mm   |
| Cover for box/housing/casing Ø:             | 112x39 mm |
| Borehole distance X:                        | 130 mm    |
| Borehole distance Y:                        | 32 mm     |

### Safety / Properties

|               |                                           |
|---------------|-------------------------------------------|
| Flammability: | Self-extinguishing according to UL 94 V-0 |
|---------------|-------------------------------------------|

### Features

|             |                           |
|-------------|---------------------------|
| Properties: | Halogen and silicone free |
|-------------|---------------------------|

### Approvals / Certifications


|                   |      |
|-------------------|------|
| Protection class: | IP66 |
|-------------------|------|

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -40 °C |
| Maximum operating temperature: | 155 °C |

The 1912.xx.FT splittable frames are equipped with threaded inserts and with front taps which allow the installation on the rear part of the panel and keep the front part clean avoiding dirt accumulation. All the other technical data are exactly the same as of the 1910 standard series.

- Flat surface without dirt deposit
- rear installation with M4 threaded inserts
- High pull-out forces according to EN 62444
- Robust construction IK10
- overmolded gasket acc. to UL 94 V-0
- Colour black

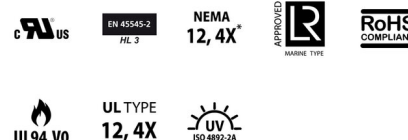

Assembly instructions



Planning data