

Product datasheet:

Splittable Frame, size Q, rear mounting

Divisible frame Series 1912.xx.FT for rear mounting

Article number:	➔ 1912.Q.FT
EAN:	7611614499673
Packaging quantity:	10
Price group:	580

Dimensions / Form

Installation opening (wall/ceiling) length:	40 mm
Installation opening (wall/ceiling) width:	39 mm
Dimension A:	74 mm
Dimension B:	61 mm
Measurement value C:	26.5 mm
Cover for box/housing/casing Ø:	40x39 mm
Borehole distance X:	58 mm
Borehole distance Y:	32 mm

Safety / Properties

Flammability:	Self-extinguishing according to UL 94 V-0
---------------	---

Features

Properties:	Halogen and silicone free
-------------	---------------------------

Approvals / Certifications


Protection class:	IP66
-------------------	------

Storage / Installation / Operation

Minimum operating temperature:	-40 °C
Maximum operating temperature:	155 °C

The 1912.xx.FT splittable frames are equipped with threaded inserts and with front taps which allow the installation on the rear part of the panel and keep the front part clean avoiding dirt accumulation. All the other technical data are exactly the same as of the 1910 standard series.

- Flat surface without dirt deposit
- rear installation with M4 threaded inserts
- High pull-out forces according to EN 62444
- Robust construction IK10
- overmolded gasket acc. to UL 94 V-0
- Colour black

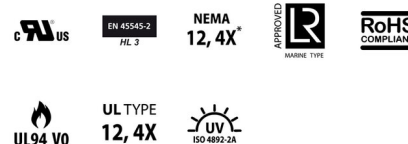

Assembly instructions



Planning data