


## Product datasheet:

### Grommet SPC series

#### Cable grommets 1929.SPC small: single, double and quadruple

· Cable gland grommets for cables with diameters from 2 to 15 mm

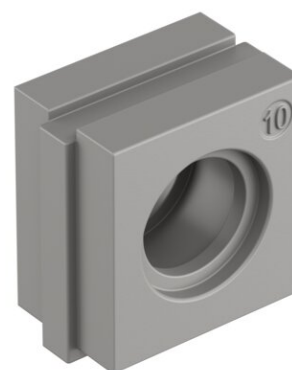

|                        |                       |
|------------------------|-----------------------|
| <b>Article number:</b> | <b>⇒ 1929.SPC.6.G</b> |
| EAN:                   | 7611614498829         |
| Packaging quantity:    | 10                    |
| Price group:           | 580                   |

#### Dimensions / Form

|                      |         |
|----------------------|---------|
| Ø min.:              | 6.0 mm  |
| Ø max.:              | 7.0 mm  |
| Dimension A:         | 20.1 mm |
| Dimension B:         | 20.9 mm |
| Measurement value C: | 12.5 mm |

#### Safety / Properties

|               |                                           |
|---------------|-------------------------------------------|
| Flammability: | Self-extinguishing according to UL 94 V-0 |
|---------------|-------------------------------------------|

#### Features

|             |                           |
|-------------|---------------------------|
| Properties: | Halogen and silicone free |
|-------------|---------------------------|

#### Approvals / Certifications

|                   |      |
|-------------------|------|
| Protection class: | IP54 |
|-------------------|------|

#### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -40 °C |
| Maximum operating temperature: | 110 °C |

The 1929.SPC series cable grommets allow cables with a diameter of 2 to 15 mm to be fed through the split frames of the 1920 & 1925 series. With the 2X and 4X versions, several cables can be fed into the same grommet.

- Model without hole available
- UL 94 V-0
- slitted grommet
- Colour grey



Planning data