

Product datasheet:

Membrane plates 1940.PDM series, size 24, 8x max. 6.5 / 4x max. 9.7 / 2x max. 16.2 / 2x max. 22 mm

Membrane plates 1940.PDM series, size 24

Article number:	1940.PDM.24/16.G
EAN:	7611614499758
Packaging quantity:	10
Price group:	580

Dimensions / Form

Installation opening (wall/ceiling) length:	112 mm
Installation opening (wall/ceiling) width:	36 mm
Dimension A:	148.6 mm
Dimension B:	59.6 mm
Measurement value C:	14 mm
Cover for box/housing/casing Ø:	112x36 mm
Borehole distance X:	130 mm
Borehole distance Y:	32 mm

Safety / Properties

Flammability:	Self-extinguishing according to UL 94 V-0
---------------	---

Features

Properties:	Halogen and silicone free
-------------	---------------------------

Approvals / Certifications


Protection class:	IP66
-------------------	------

Storage / Installation / Operation

Minimum operating temperature:	-40 °C
Maximum operating temperature:	110 °C

The 1940.PDM.24 series is an innovative alternative to cable glands for control cabinets and devices. The cable is pushed through the front membrane, while the second membrane increases strain relief and fluid resistance.

- For a large number of cables without connectors
- high strain relief thanks to the double membrane
- cost efficient solution
- threaded inserts or plastic rivets version on request
- Colour grey

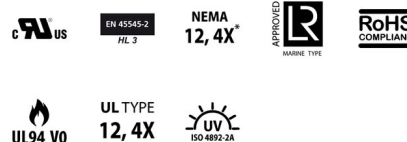

Assembly instructions



Planning data