

Product datasheet:

Multi Cable Entry MCE

Multi Cable Entry MCE Pro

- High tightness IP6X / IPX8 / IPX9K according to EN62444
- Absolute process safety
- Flexibility in the clamping area due to multiLAYER sealing units
- High pull-out forces according to EN 62444
- Fast and cost-saving assembly
- Extremely robust and flexible
- No auxiliary materials and lubricants necessary
- Prefabrication



Article number:  **1908.88.08.010**


E-No: 121810008

EAN: 7611614466989

Packaging quantity: 1

Dimensions / Form

Installation opening (wall/ceiling) length:	112 mm
Installation opening (wall/ceiling) width:	50 mm
Dimension A:	148 mm
Dimension B:	79 mm
Measurement value C:	26 mm
Cover for box/housing/casing Ø:	112x50 mm
Borehole distance X:	130 mm
Borehole distance Y:	32 mm

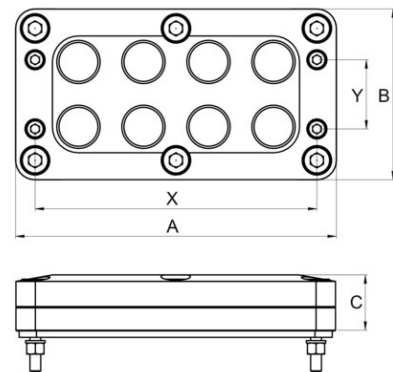

Connections / Entries

Min. clamping range:	4 mm
Max. clamping range:	10 mm

Approvals / Certifications

Protection class:	IP68
Protection class with condition:	IP68 (0.3 bar - 30 min)

Storage / Installation / Operation

Minimum operating temperature:	-30 °C
Maximum operating temperature:	105 °C



Assembly instructions