

Product datasheet:

Multi Cable Entry MCE EMC

Multi Cable Entry MCE Pro EMC

- Powerful and safe clamping shield due to spring contact system
- Low transfer impedance
- Absolute process safety with regard to system assembly, full installation control with regard to screen
- High tightness IP6X / IPX8 / IPX9K according to EN62444
- Flexibility in the clamping area due to multiLAYER sealing units
- High pull-out forces according to EN 62444
- Fast and cost-saving assembly
- Extremely robust (impact resistance)
- No auxiliary materials and lubricants necessary



Article number: [1908.88.03.83.103](#)

E-No: 121810088

EAN: 7611614467566

Packaging quantity: 1

Dimensions / Form

Installation opening (wall/ceiling) length: 112 mm

Installation opening (wall/ceiling) width: 50 mm

Dimension A: 148 mm


Dimension B: 79 mm

Measurement value C: 26 mm

Cover for box/housing/casing Ø: 112x50 mm

Borehole distance X: 130 mm

Borehole distance Y: 32 mm

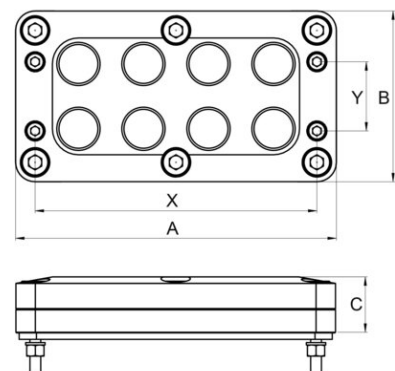

Connections / Entries

Min. clamping range: 10 mm

Max. clamping range: 22.5 mm

Max. shield braiding: 21 mm

Shield braid min.: 7.5 mm



[Assembly instructions](#)

Approvals / Certifications

Protection class: IP68

Protection class with condition: IP68 (0.3 bar - 30 min)

Storage / Installation / Operation

Minimum operating temperature: -30 °C

Maximum operating temperature: 105 °C