

## Product datasheet:

# Multi Cable Entry MCE

## Multi Cable Entry MCE Pro

- High tightness IP6X / IPX8 / IPX9K according to EN62444
- Absolute process safety
- Flexibility in the clamping area due to multiLAYER sealing units
- High pull-out forces according to EN 62444
- Fast and cost-saving assembly
- Extremely robust and flexible
- No auxiliary materials and lubricants necessary
- Prefabrication



**Article number:**  **1908.88.08.020**

**EAN:** 7611614467078

**Packaging quantity:** 1

**Price group:** 580

### Dimensions / Form

Installation opening (wall/ceiling) length: 112 mm

Installation opening (wall/ceiling) width: 50 mm

Dimension A: 148 mm


Dimension B: 79 mm

Measurement value C: 26 mm

Cover for box/housing/casing Ø: 112x50 mm

Borehole distance X: 130 mm

Borehole distance Y: 32 mm

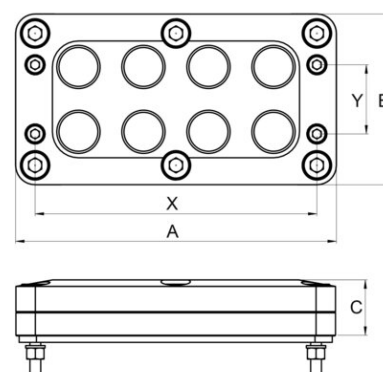

### Connections / Entries

Min. clamping range: 4 mm

Max. clamping range: 10 mm

### Approvals / Certifications

Protection class: IP68

Protection class with condition: IP68 (4 bar - 60 min)



Assembly instructions

### Storage / Installation / Operation

Minimum operating temperature: -30 °C

Maximum operating temperature: 105 °C