

Product datasheet:

Multi Cable Entry MCE EMC

Multi Cable Entry MCE Pro EMC

- Powerful and safe clamping shield due to spring contact system
- Low transfer impedance
- Absolute process safety with regard to system assembly, full installation control with regard to screen
- High tightness IP6X / IPX8 / IPX9K according to EN62444
- Flexibility in the clamping area due to multiLAYER sealing units
- High pull-out forces according to EN 62444
- Extremely robust (impact resistance)
- No auxiliary materials and lubricants necessary



Article number: [1908.88.03.83.113](#)


E-No: 121810128

EAN: 7611614467573

Packaging quantity: 1

Dimensions / Form

Installation opening (wall/ceiling) length:	112 mm
Installation opening (wall/ceiling) width:	50 mm
Dimension A:	148 mm
Dimension B:	79 mm
Measurement value C:	26 mm
Cover for box/housing/casing Ø:	112x50 mm
Borehole distance X:	130 mm
Borehole distance Y:	32 mm

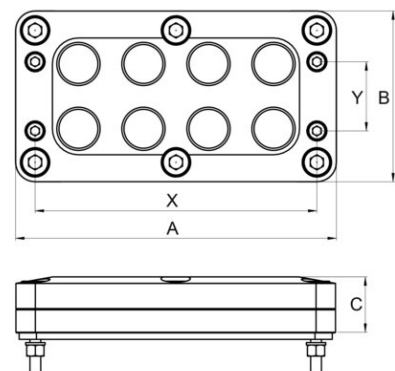

Connections / Entries

Min. clamping range:	10 mm
Max. clamping range:	22.5 mm
Max. shield braiding:	21 mm
Shield braid min.:	7.5 mm



Assembly instructions

Approvals / Certifications

Protection class:	IP68
Protection class with condition:	IP68 (4 bar - 60 min)

Storage / Installation / Operation

Minimum operating temperature:	-30 °C
Maximum operating temperature:	105 °C