

## Product datasheet:

# Multi Cable Entry MCE EMC

## Multi Cable Entry MCE Pro EMC

- Powerful and safe clamping shield due to spring contact system
- Low transfer impedance
- Absolute process safety with regard to system assembly, full installation control with regard to screen
- High tightness IP6X / IPX8 / IPX9K according to EN62444
- Flexibility in the clamping area due to multiLAYER sealing units
- High pull-out forces according to EN 62444
- Extremely robust (impact resistance)
- No auxiliary materials and lubricants necessary



**Article number:** [1908.88.08.83.111](#)


E-No: 121810098

EAN: 7611614467597

Packaging quantity: 1

### Dimensions / Form

|                                             |           |
|---------------------------------------------|-----------|
| Installation opening (wall/ceiling) length: | 112 mm    |
| Installation opening (wall/ceiling) width:  | 50 mm     |
| Dimension A:                                | 148 mm    |
| Dimension B:                                | 79 mm     |
| Measurement value C:                        | 26 mm     |
| Cover for box/housing/casing Ø:             | 112x50 mm |
| Borehole distance X:                        | 130 mm    |
| Borehole distance Y:                        | 32 mm     |

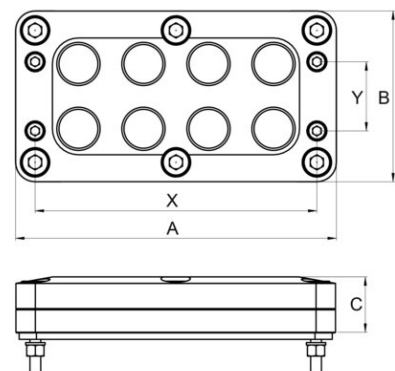

### Connections / Entries

|                       |        |
|-----------------------|--------|
| Min. clamping range:  | 4 mm   |
| Max. clamping range:  | 10 mm  |
| Max. shield braiding: | 12 mm  |
| Shield braid min.:    | 3.5 mm |



Assembly instructions

### Approvals / Certifications

|                                  |                       |
|----------------------------------|-----------------------|
| Protection class:                | IP68                  |
| Protection class with condition: | IP68 (4 bar - 60 min) |

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -30 °C |
| Maximum operating temperature: | 105 °C |