

## Product datasheet:

# Flanged fitting Progress M50 without seal insert

## Flanged fitting Progress M50

- Simple mounting; frontal screw mounting with low tightening torques
- Quick assembly with ratchet or cordless screwdriver (no bulky open-end spanners)
- Customised sealing units (with regard to hole pattern, sealing material, etc.)
- Absolute process safety; tightening "on block"
- No twisting of the cable during assembly
- High tightness (customer-specific requirements can be implemented)
- High strain relief forces
- Anodised aluminium: highest robustness and possibility of subassembly customisation
- No auxiliary materials and lubricants necessary



**Article number:**  **1988.88.001**

E-No: 126687003


EAN: 7611614467245

Packaging quantity: 1

### Dimensions / Form

Dimension A: 88 mm

Measurement value C: 39 mm

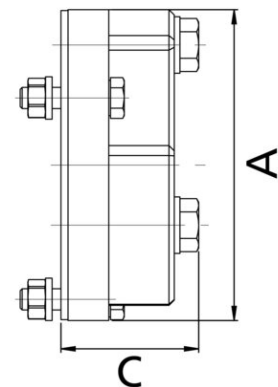

### Approvals / Certifications

Protection class: According to customer requirements

### Storage / Installation / Operation

Minimum operating temperature: -40 °C

Maximum operating temperature: 100 °C