

## Product datasheet:

# Cable glands Progress® according to EN 45545-2/3 and NFPA 130 EMC easyCONNECT with contact spring

## Short entry thread metric

- Two-piece sealing insert
- not overall length insulated
- 1 = One-piece sealing insert
- Entry thread Pg and NPT
- Executions in steel A2 and A4



**Article number:** **GD F1083.25**

**EAN:** 7611614293240

**Packaging quantity:** 25

### Dimensions / Form

**Thread:** M25x1.5

**Spanner size:** 30 mm

**Dimension H:** 33 mm

**Thread length L:** 7 mm

### Connections / Entries

**Min. clamping range:** 16 mm

**Max. clamping range:** 20.5 mm

**Clamping range with inlet min.:** 12.5 mm

**Clamping range with inlet max.:** 16 mm

**clamp technology:** Compression technology

**Contact:** Contact spring

### Features

**Properties:** For a quick and safe installation of partially dismantled cables as well as thoroughly shielded cables

**Thread type:** metric

**Thread length:** short

### Approvals / Certifications


**Protection class:** IP69

**Protection class with condition:** IP 68 (10 bar) / IP69

### Storage / Installation / Operation

**Minimum operating temperature:** -50 °C

**Maximum operating temperature:** 105 °C

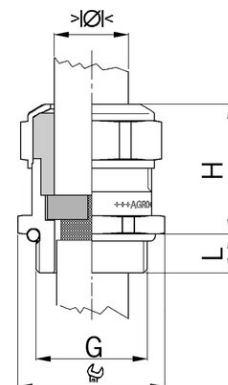

Assembly instructions



Certificates



Planning data