

Product datasheet:

Cable glands Progress® according to EN 45545-2/3 and NFPA 130 EMC easyCONNECT with contact spring

Short entry thread metric

- Two-piece sealing insert
- not overall length insulated
- 1 = One-piece sealing insert
- Entry thread Pg and NPT
- Executions in steel A2 and A4



Article number: **GD F1083.40**

EAN: 7611614344720

Packaging quantity: 10

Price group: 520

Dimensions / Form

Thread: M40x1.5

Spanner size: 46 mm

Dimension H: 38 mm

Thread length L: 8 mm

Connections / Entries

Min. clamping range: 28.5 mm

Max. clamping range: 33 mm

Clamping range with inlet min.: 24 mm

Clamping range with inlet max.: 28.5 mm

clamp technology: Compression technology

Contact: Contact spring

Features

Properties: For a quick and safe installation of partially dismantled cables as well as thoroughly shielded cables

Thread type: metric

Thread length: short

Approvals / Certifications


Protection class: IP69

Protection class with condition: IP 68 (10 bar) / IP69

Storage / Installation / Operation

Minimum operating temperature: -50 °C

Maximum operating temperature: 105 °C

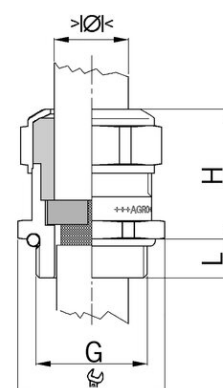

EN 45545-2
HL 3



EN 45545-3
E30



Assembly instructions



Certificates



Planning data