

## Product datasheet:

# AGRO cable glands Ex Compact nickel-plated brass flameproof enclosure Ex d IIC and increased safety Ex e II

## Entry thread metric

### Approval type: EX Compact MS

- One-piece sealing insert
- not overall length insulated
- Stainless steel A2 or A4



**Article number:** EX1126.25.150

E-No: 121442778

EAN: 7611614242309

Packaging quantity: 20

### Dimensions / Form

Thread: M25x1.5

Spanner size: 32 mm

Dimension H: 28 mm

Thread length L: 12 mm

### Connections / Entries

Min. clamping range: 7.5 mm

Max. clamping range: 15 mm

clamp technology: Compression technology

### Features

Thread type: metric

### Approvals / Certifications

Protection class: IP67

Protection class with condition: IP 66 - IP 68 (30 bar)

Explosion-proof design: Yes

EX zone: Gas 1 and 2 - Dust 21 and 22

Gas: II 2G Ex db eb IIC Gb

Dust: II 2D Ex ta IIIC

Test standard: IEC EN 60079-7


IECEx certification: IECEx PTB 12.0055X

Further certifications: PTB 10 ATEX 1034X

Connectivity certification: PTB 10 ATEX 1034X

### Storage / Installation / Operation

Minimum operating temperature: -60 °C

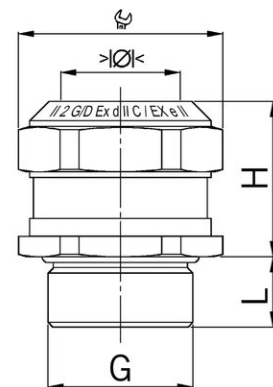

Assembly instructions



Certificates



Planning data

## Product datasheet:

Maximum operating temperature:

105 °C

---