

Product datasheet:

AGRO cable glands Ex Compact nickel-plated brass flameproof enclosure Ex d IIC and increased safety Ex e II

Entry thread metric

Approval type: EX Compact MS

- One-piece sealing insert
- not overall length insulated
- Stainless steel A2 or A4



Article number: [EX1126.32.260](#)

E-No: 121442838

EAN: 7611614242330

Packaging quantity: 10

Dimensions / Form

Thread: M32x1.5

Spanner size: 41 mm

Dimension H: 33 mm

Thread length L: 12 mm

Connections / Entries

Min. clamping range: 21 mm

Max. clamping range: 26 mm

clamp technology: Compression technology

Features

Thread type: metric

Approvals / Certifications

Protection class: IP67

Protection class with condition: IP 66 - IP 68 (30 bar)

Explosion-proof design: Yes

EX zone: Gas 1 and 2 - Dust 21 and 22

Gas: II 2G Ex db eb IIC Gb

Dust: II 2D Ex ta IIIC

Test standard: IEC EN 60079-7


IECEx certification: IECEx PTB 12.0055X

Further certifications: PTB 10 ATEX 1034X

Connectivity certification: PTB 10 ATEX 1034X

Storage / Installation / Operation

Minimum operating temperature: -60 °C

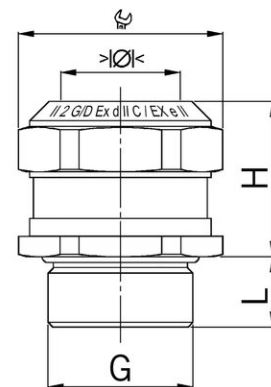

Assembly instructions



Certificates



Planning data

Product datasheet:

Maximum operating temperature: 105 °C
