

Product datasheet:

AGRO cable glands Ex Compact nickel-plated brass with clamps Ex d IIC and Ex e II

Entry thread metric

Approval type: EX Compact MS KB

- One-piece sealing insert
- not overall length insulated
- Entry thread Pg and NPT
- Stainless steel A2 or A4



Article number:  **EX1826.25.180**

EAN: 7611614316154

Packaging quantity: 20

Price group: 530

Dimensions / Form

Thread: M25x1.5

Spanner size: 32 mm

Dimension H: 37 mm

Thread length L: 12 mm

Connections / Entries

Min. clamping range: 12.5 mm

Max. clamping range: 18 mm

clamp technology: Compression technology

Features

Thread type: metric

Approvals / Certifications

Protection class: IP67

Protection class with condition: IP 66 - IP 68 (30 bar)

Explosion-proof design: Yes

EX zone: Gas 1 and 2 - Dust 21 and 22

Gas: II 2G Ex db eb IIC Gb


Dust: II 2D Ex tb IIIC Db

Test standard: IEC EN 60079-7

IECEx certification: IECEx SEV 17.0017

Further certifications: SEV 17 ATEX 0153

Connectivity certification: SEV 17 ATEX 0153

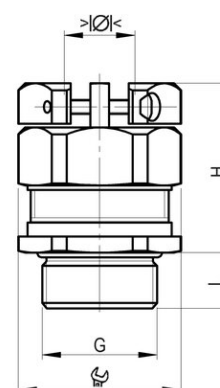

Assembly instructions



Certificates



Planning data

Product datasheet:

Storage / Installation / Operation

Minimum operating temperature:	-60 °C
Maximum operating temperature:	105 °C