

Product datasheet:

AGRO cable glands Ex Compact nickel-plated brass with clamps Ex d IIC and Ex e II

Entry thread metric

Approval type: EX Compact MS KB

- One-piece sealing insert
- not overall length insulated
- Entry thread Pg and NPT
- Stainless steel A2 or A4



Article number:	EX1826.50.420
E-No:	121472858
EAN:	7611614316215
Packaging quantity:	5

Dimensions / Form

Thread:	M50x1.5
Spanner size:	60 mm
Dimension H:	50 mm
Thread length L:	14 mm

Connections / Entries


Min. clamping range:	35 mm
Max. clamping range:	42 mm
clamp technology:	Compression technology

Features

Thread type:	metric
--------------	--------

Approvals / Certifications

Protection class:	IP67
Protection class with condition:	IP 66 - IP 68 (30 bar)
Explosion-proof design:	Yes
EX zone:	Gas 1 and 2 - Dust 21 and 22
Gas:	II 2G Ex db eb IIC Gb
Dust:	II 2D Ex tb IIIC Db
Test standard:	IEC EN 60079-7
IECEx certification:	IECEx SEV 17.0017
Further certifications:	SEV 17 ATEX 0153
Connectivity certification:	SEV 17 ATEX 0153

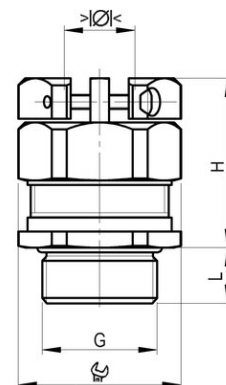

Assembly instructions



Certificates



Planning data

Product datasheet:

Storage / Installation / Operation

Minimum operating temperature:	-60 °C
Maximum operating temperature:	105 °C