

## Product datasheet:

# AGRO cable glands Progress® nickel-plated brass increased safety Ex e II for installation of multiple cables

## Short entry thread Pg

### Approval type: Progress MS Multi EX

- One-piece sealing insert
- not overall length insulated
- 3 = Material sealing insert NBR
- Suitable locking pins see accessories
- Executions in steel A2 and A4, entry thread NPT



**Article number:** EX1310.16.3.060

**EAN:** 7611614239484

**Packaging quantity:** 50

**Price group:** 530

### Dimensions / Form


**Thread:** Pg 16

**Product length:** 6 mm

**Spanner size:** 24 mm

**Dimension H:** 23 mm

**Dimension L:** 6 mm

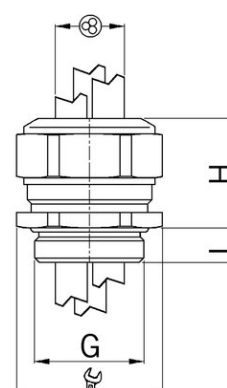

### Connections / Entries

**Min. clamping range:** 4.5 mm

**Max. clamping range:** 6 mm

**clamp technology:** Compression technology

### Features

**Thread type:** Pg

**Thread length:** short

### Approvals / Certifications

**Protection class:** IP66

**Explosion-proof design:** Yes

**EX zone:** Gas 1 and 2 - Dust 21 and 22

**Gas:** II 2G Ex eb IIC Gb

**Dust:** II 2D Ex tb IIIC Db

**Test standard:** IEC EN 60079-7

**IECEx certification:** IECEx SEV 15.0019X

**Further certifications:** SEV 15 ATEX 0152X

**Connectivity certification:** SEV 15 ATEX 0152X



Assembly instructions



Certificates



Planning data

## Product datasheet:

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -60 °C |
| Maximum operating temperature: | 100 °C |